


Correction Model for HS-WIM Systems Based on Pavement Temperature and Vehicle Speed

Gustavo G. Otto - Lucas Franceschi - Bruno M. Gevaerd - Rafael A. Souza - Amir M. Valente
Transportation and Logistics Laboratory (LabTrans)
Federal University of Santa Catarina (UFSC)


Inland Transport in Brazil

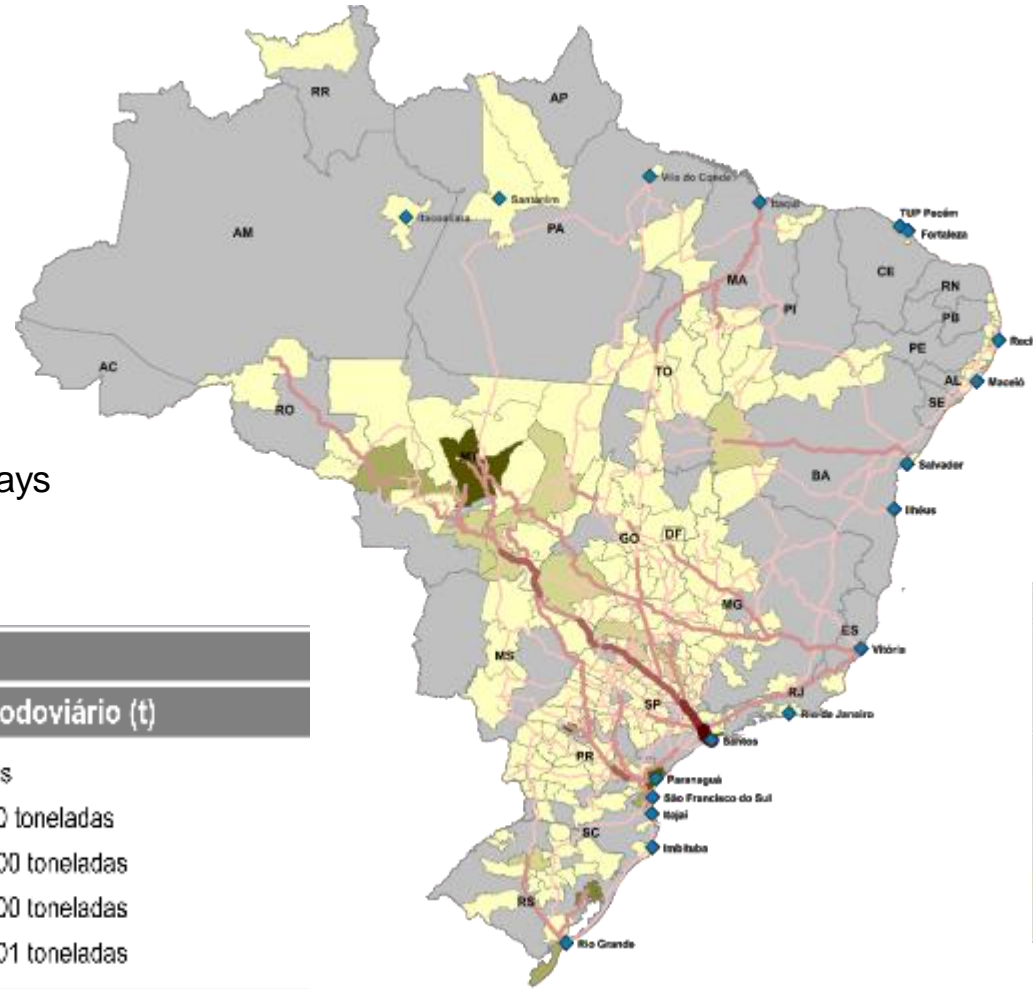


-*Input* - o exportation flux, ref. year 2014
Products: Sugar, Corn and Been, by grouped in microregions.
source: AliceWeb.

Main road transport - highways

Volumes de Produção

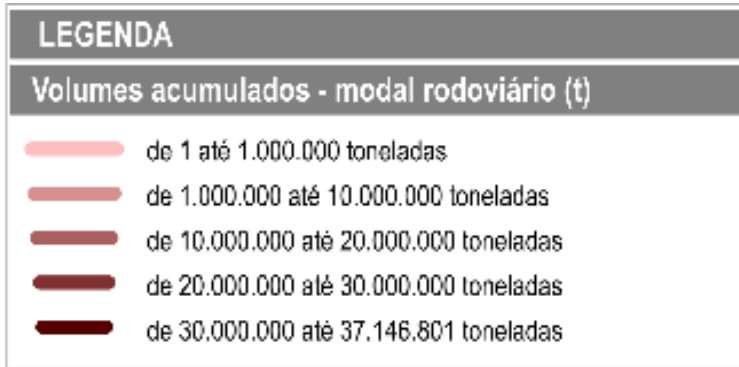


Climate Map of Brazil

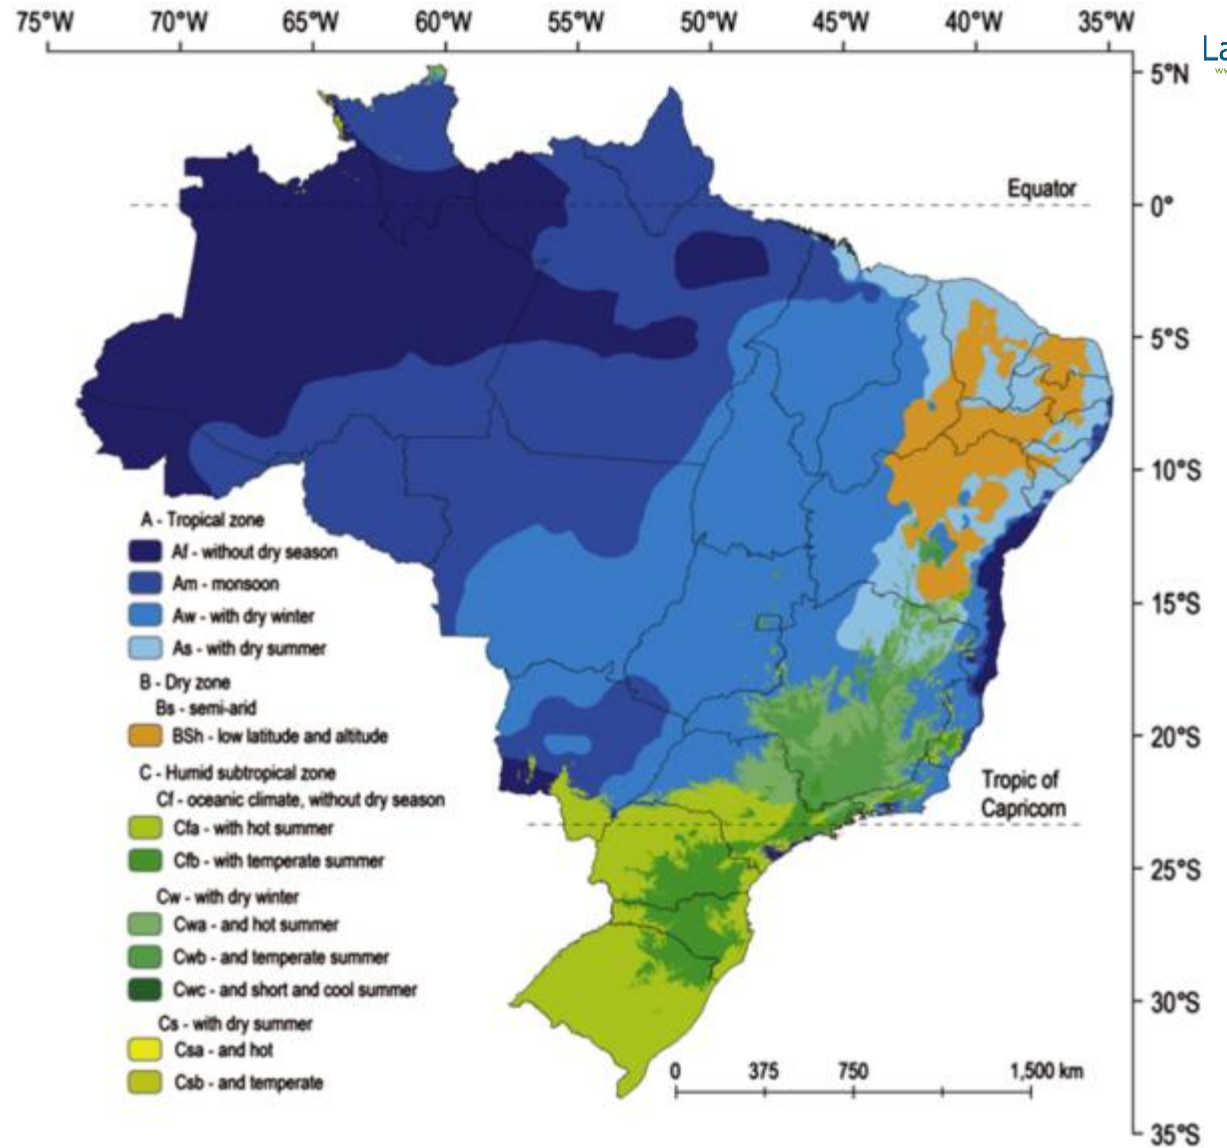


Alvares, C.A. et al. (2013). *Köppen's climate classification map for Brazil.*

HS-WIM system

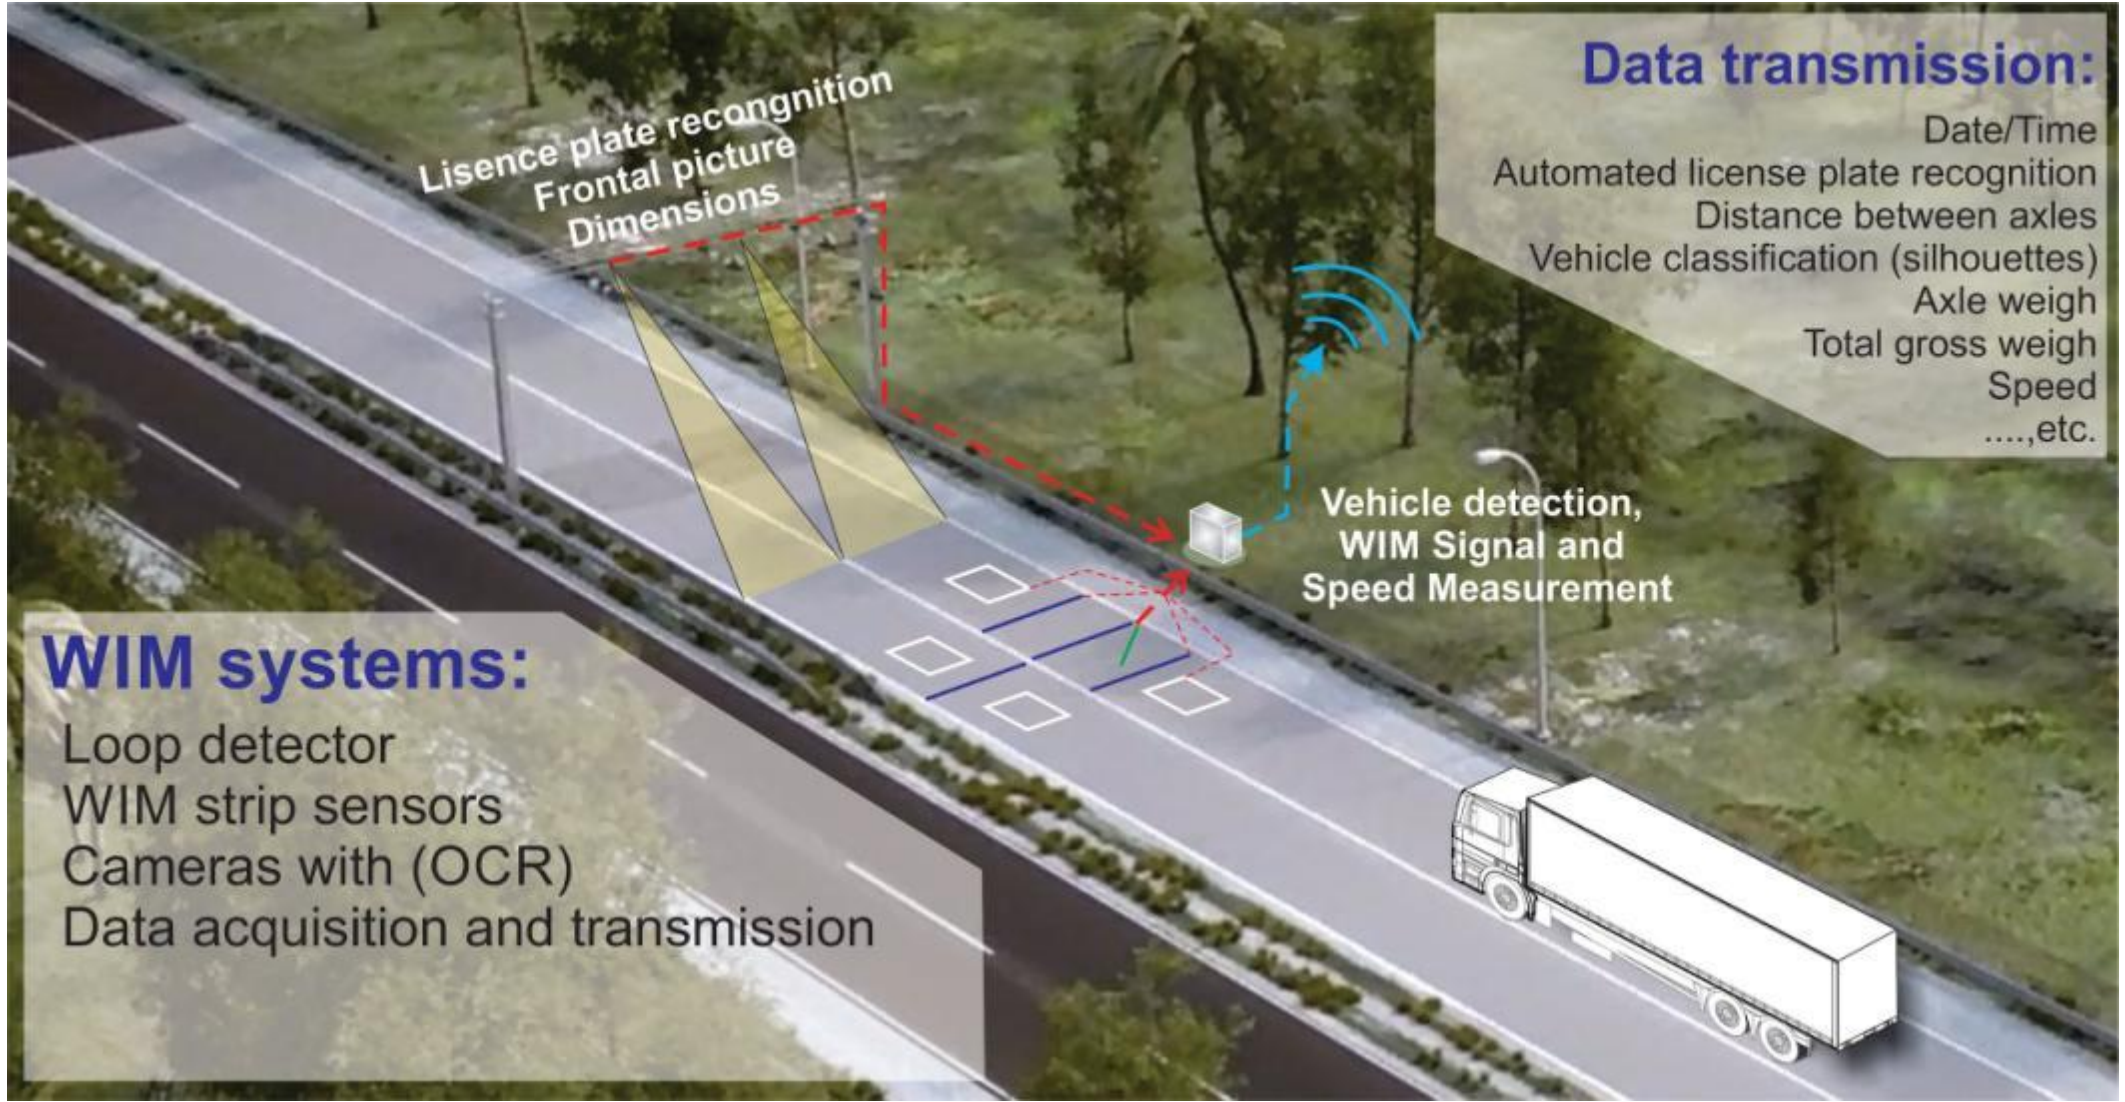

Description of the experimental site

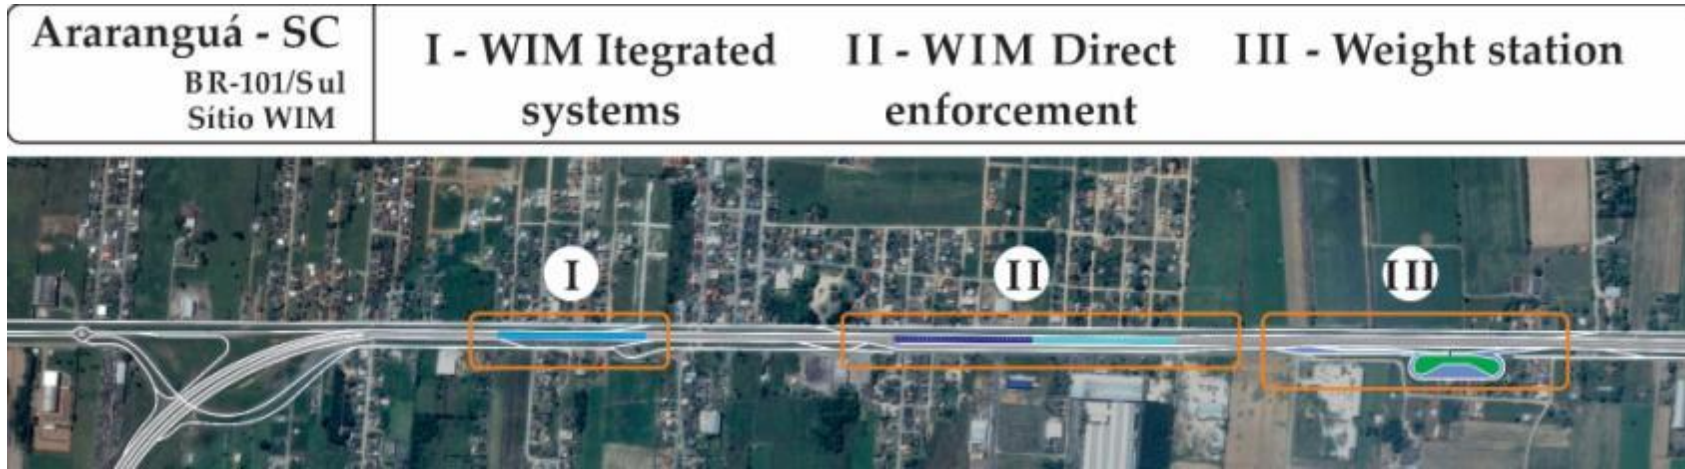

Integrated Station



Thick Asphalt Pavement




CRCP




Weight Station





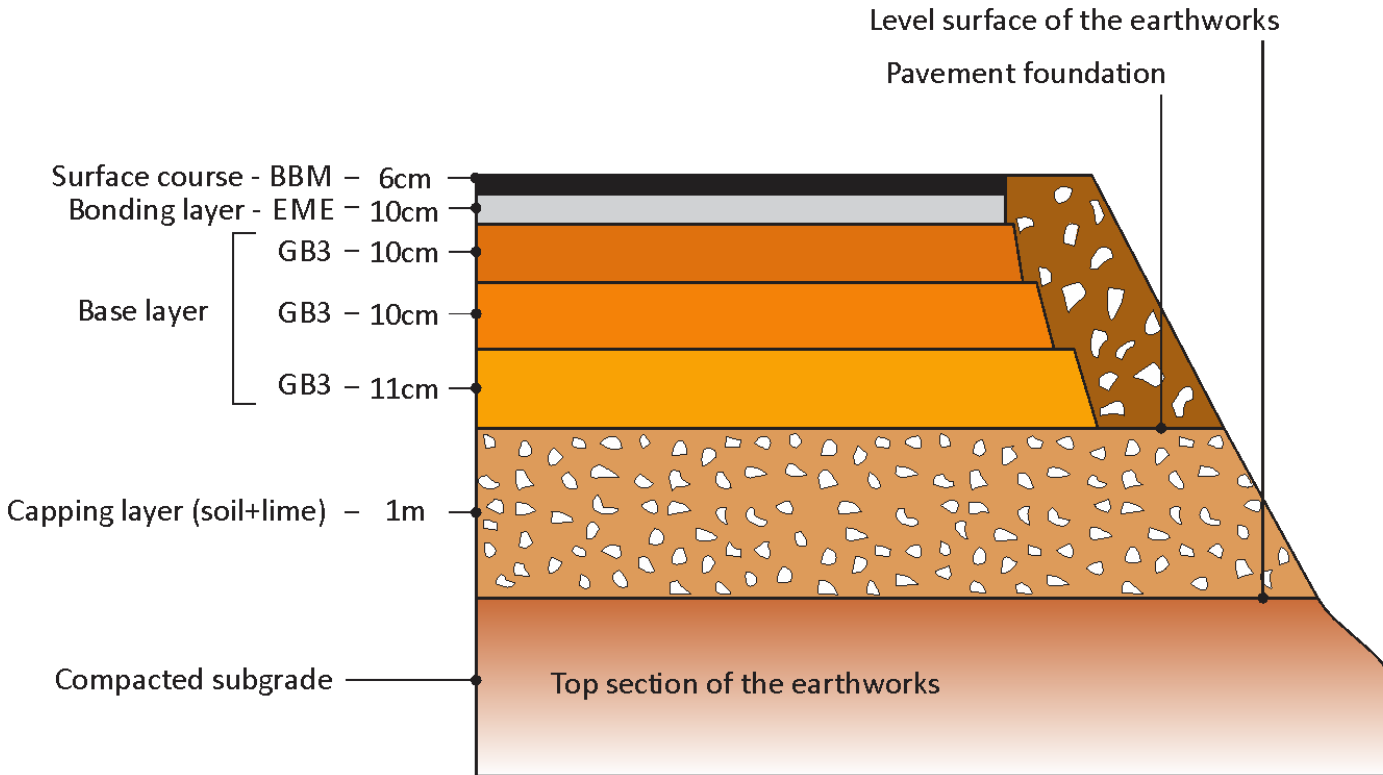

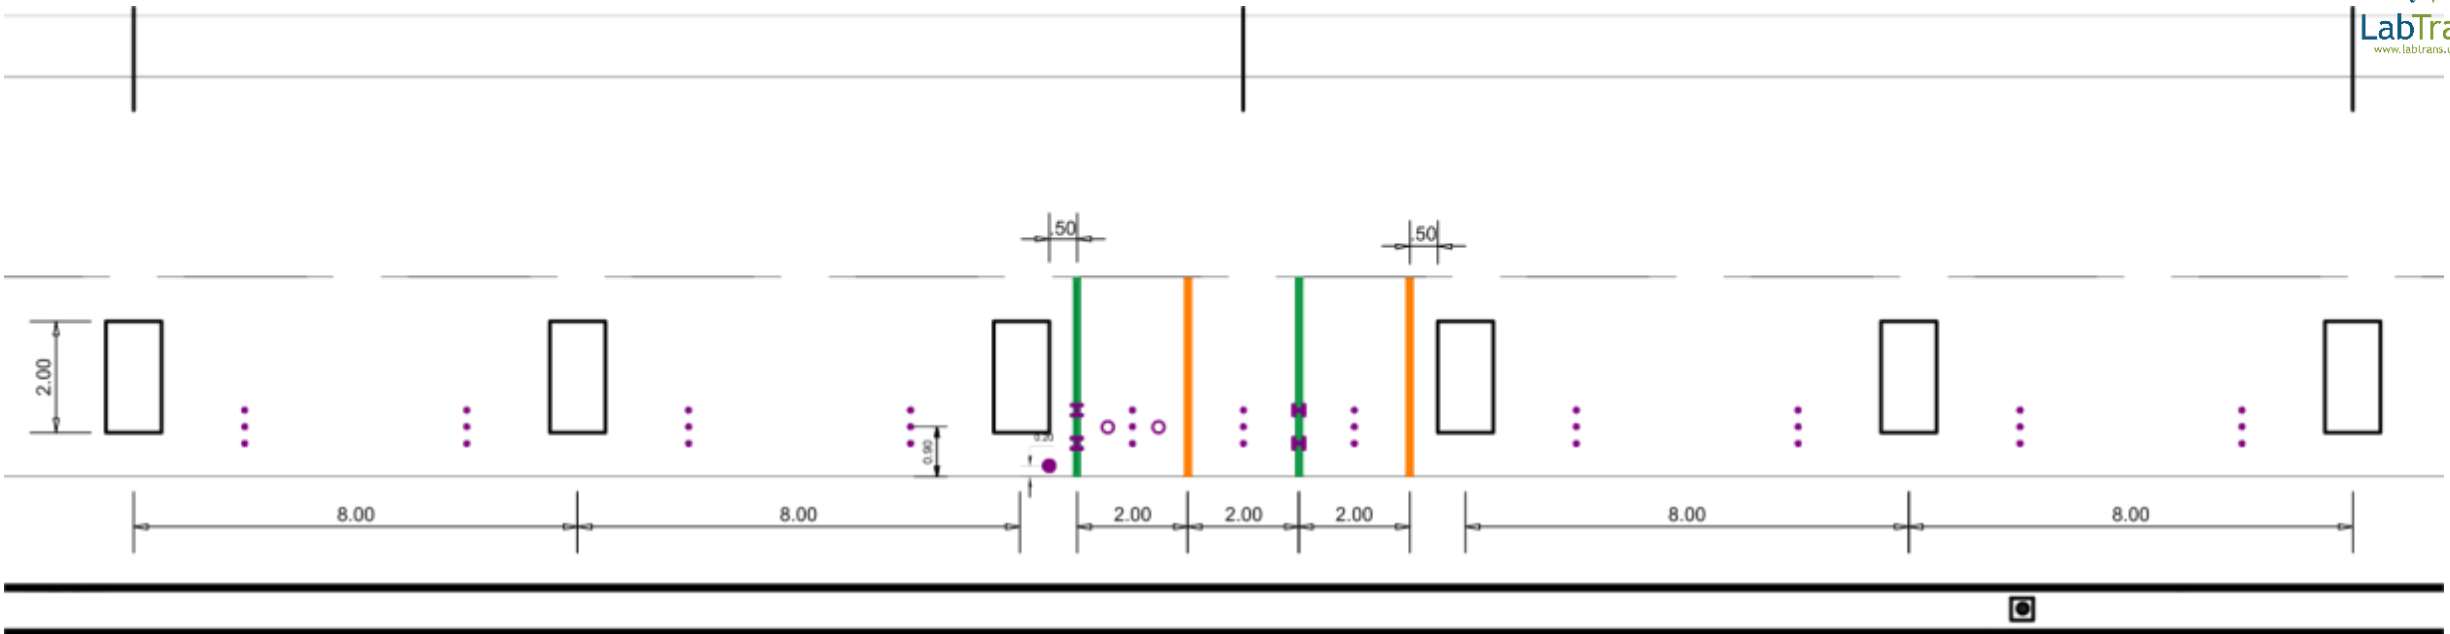


Description of the experimental site



Description of the experimental site




LabTrans

Legend			
	- Inductive Loop		- Geophone
	- Polymer sensor		- Vertical strain gage
	- Ceramic sensor		- Transversal and longitudinal strain gage
			- Temperature gauge

Description of the experimental site




Marking and cutting the pavement

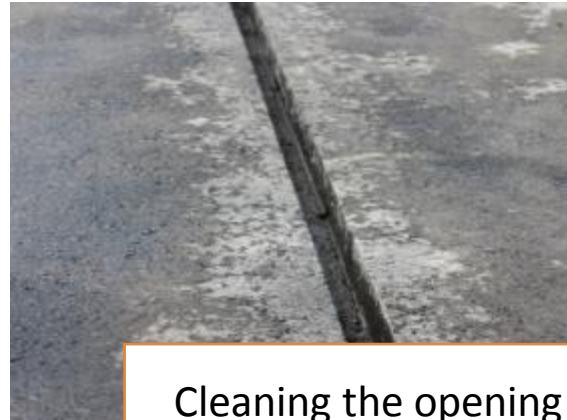

Cleaning the opening



Sensor placement

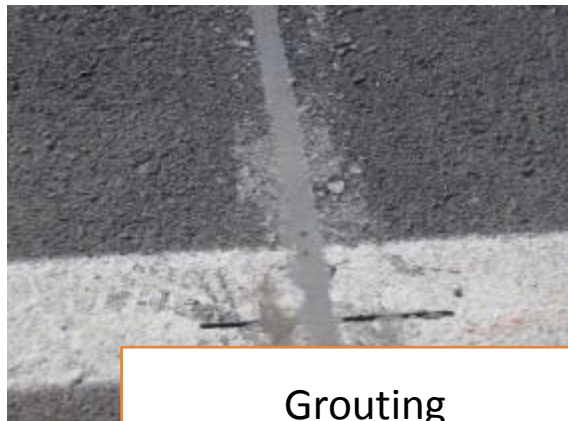

Grouting



Surface grinning



HS-WIM system

The proposed method is a correction of the weight as a function of:

- Temperature of the pavement
- Vehicle speed

Statistical Correction Model

$$C(T, S) = \begin{cases} T \in [T_{1,l}, T_{1,u}) \rightarrow a_1 S + b_1 \\ T \in [T_{2,l}, T_{2,u}) \rightarrow a_2 S + b_2 \\ T \in [T_{3,l}, T_{3,u}) \rightarrow a_3 S + b_3 \\ \vdots \\ T \in [T_{n,l}, T_{n,u}) \rightarrow a_n S + b_n \end{cases}$$

Test plan:

- ❑ Three types of vehicles.
- ❑ Seven (7) runs were planned for each vehicle, for each speed and lateral position.
- ❑ The three speeds chosen are:
 - ❑ **60, 70 and 80 km/h.**
 - ❑ **Lateral positioning: left, center and right.**
- ❑ The test calibration and test evaluations was performed on consecutive days:
 - ❑ **From May 5th to May 8th of 2019 – calibration.**
 - ❑ **May 9th of 2019 - test for evaluation.**


Test campaign using known vehicles



Table 1. Axle weight of each axle of the three reference vehicles

Vehicle	Axle 1 (kN)	Axle 2 (kN)	Axle 3 (kN)	Axle 4 (kN)	Axle 5 (kN)	Axle 6 (kN)
3 axles	53.710	97.048	76.995	–	–	–
5 axles	56.774	102.881	95.054	81.008	67.235	–
6 axles	51.456	90.810	68.190	78.408	81.309	64.286

Practical application

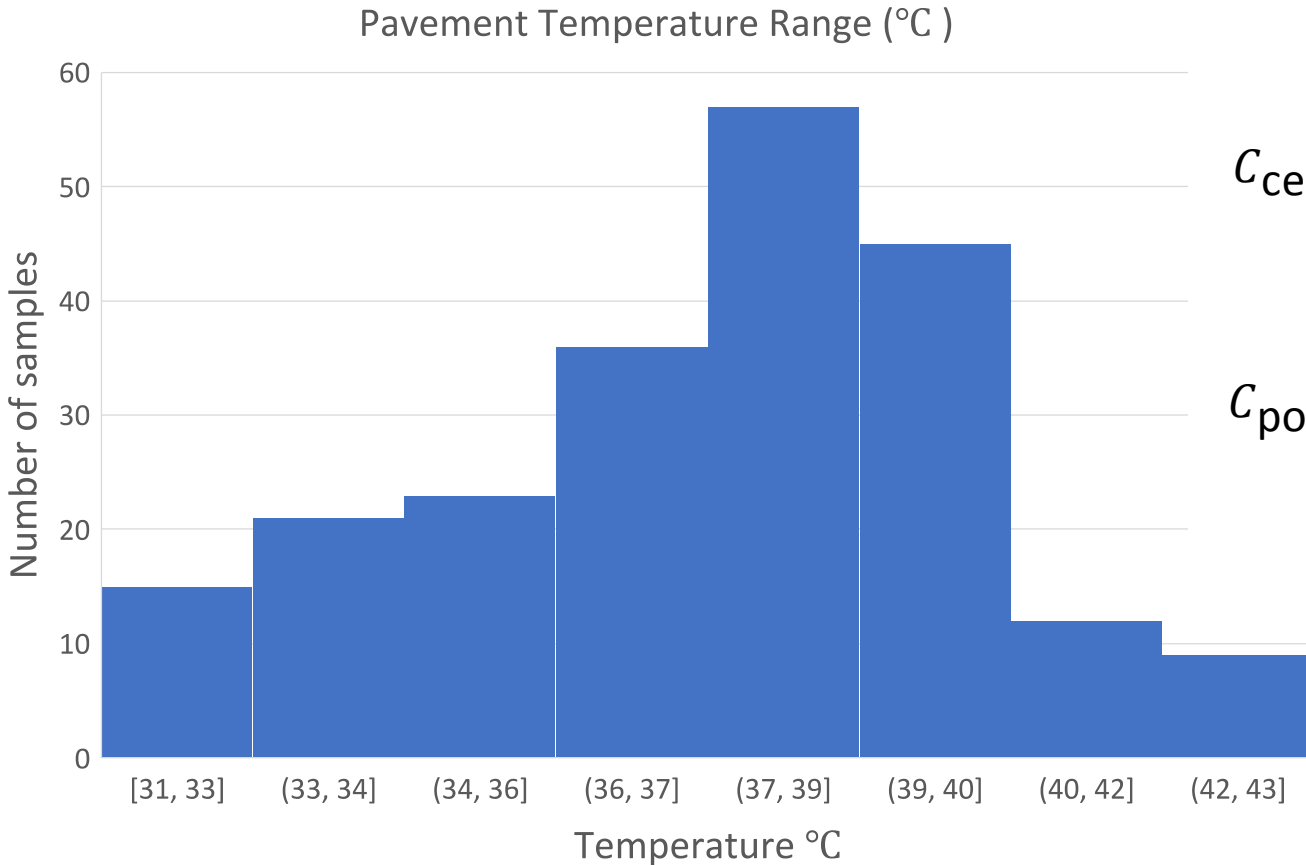


$$C_{\text{cera}}^m (T, V) = \begin{cases} T \in [33,85^4, 37,45^9) \rightarrow 0,02^1 S + 0,81^6 \\ T \in [37,45^9, 40,42^1) \rightarrow 0,01^8 S + 0,80^3 \\ T \in [40,42^1, 41,55^3) \rightarrow 0,01^6 S + 0,81^1 \\ T \in [41,55^3, 43,83^8) \rightarrow 0,01^8 S + 0,75^0 \end{cases}$$

$$C_{\text{poly}}^m (T, V) = \begin{cases} T \in [33,85^4, 37,45^9) \rightarrow 0,02^0 S + 0,66^8 \\ T \in [37,45^9, 40,42^1) \rightarrow 0,03^0 S + 0,56^0 \\ T \in [40,42^1, 41,55^3) \rightarrow 0,03^1 S + 0,55^9 \\ T \in [41,55^3, 43,83^8) \rightarrow 0,04^4 S + 0,35^2 \end{cases}$$

The measured pavement temperature varied between 33.9 °C and 43.8 °C

System Errors without calibration

GVW - Original Data

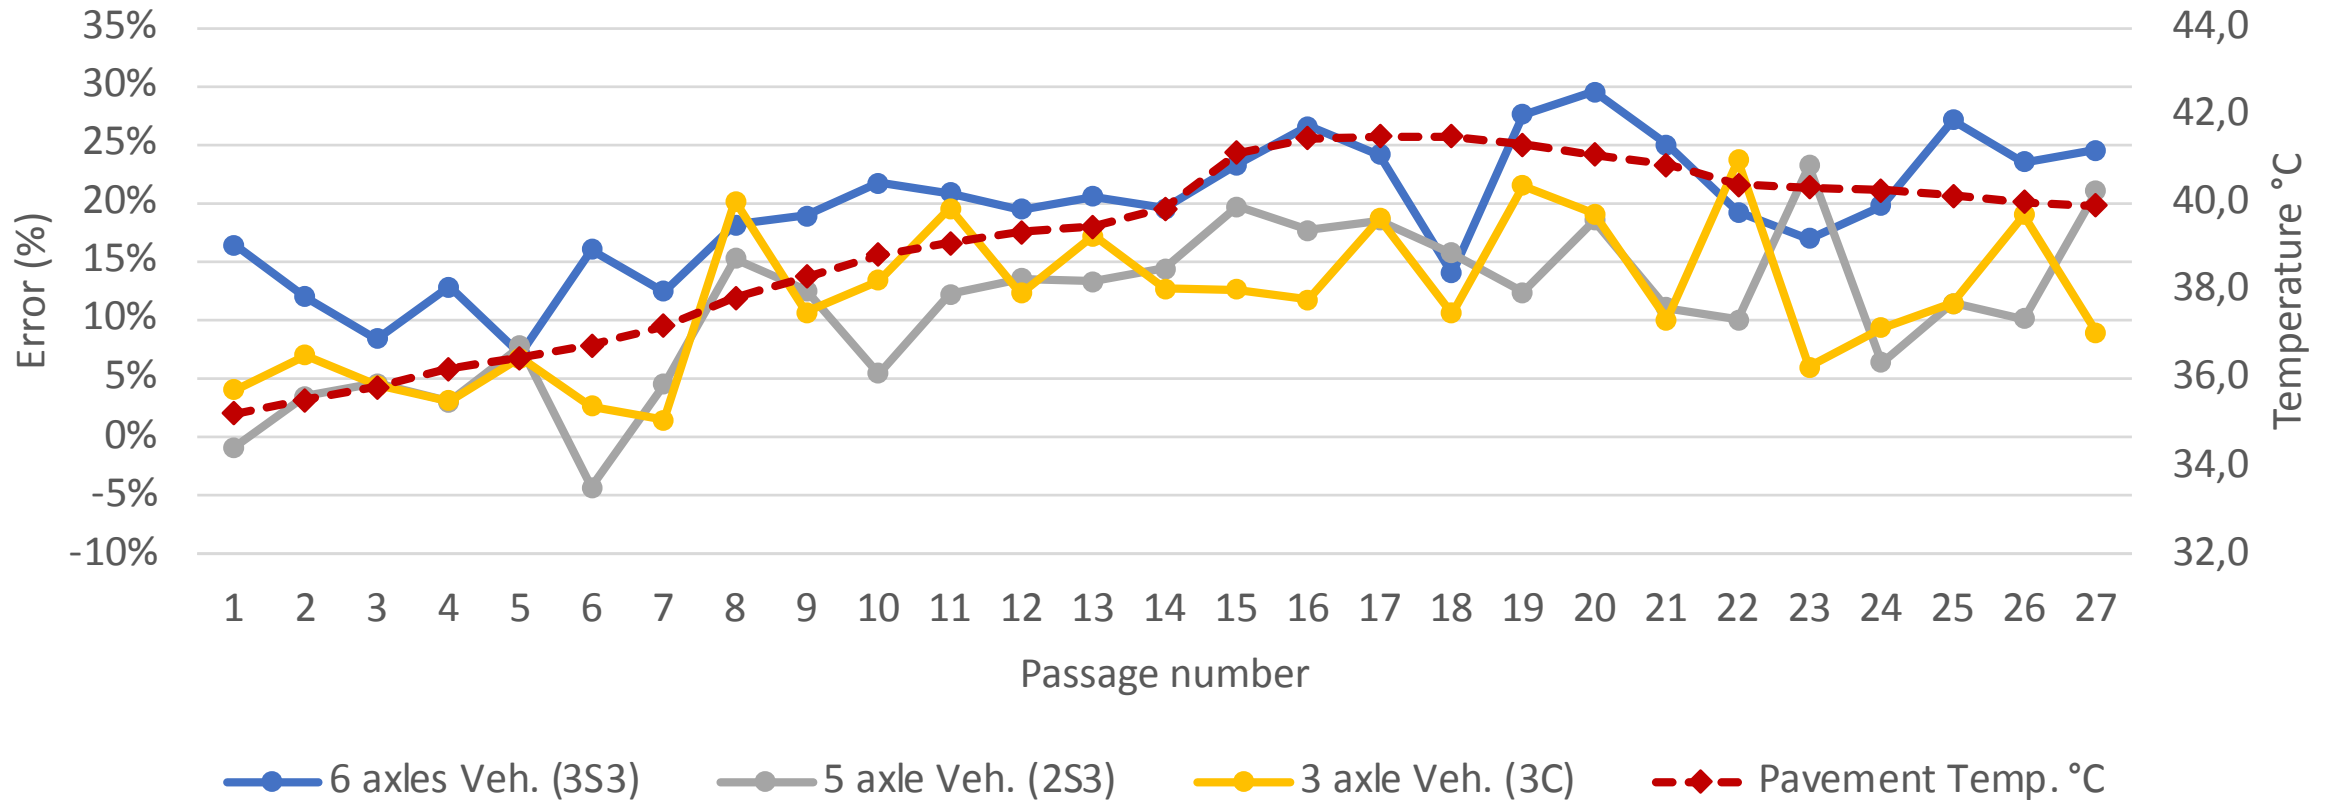


System Errors after correction

3 Axle Vehicle (class 3C)

5 Axle Vehicle (class 2S3)

6 Axle Vehicle (class 3S3)

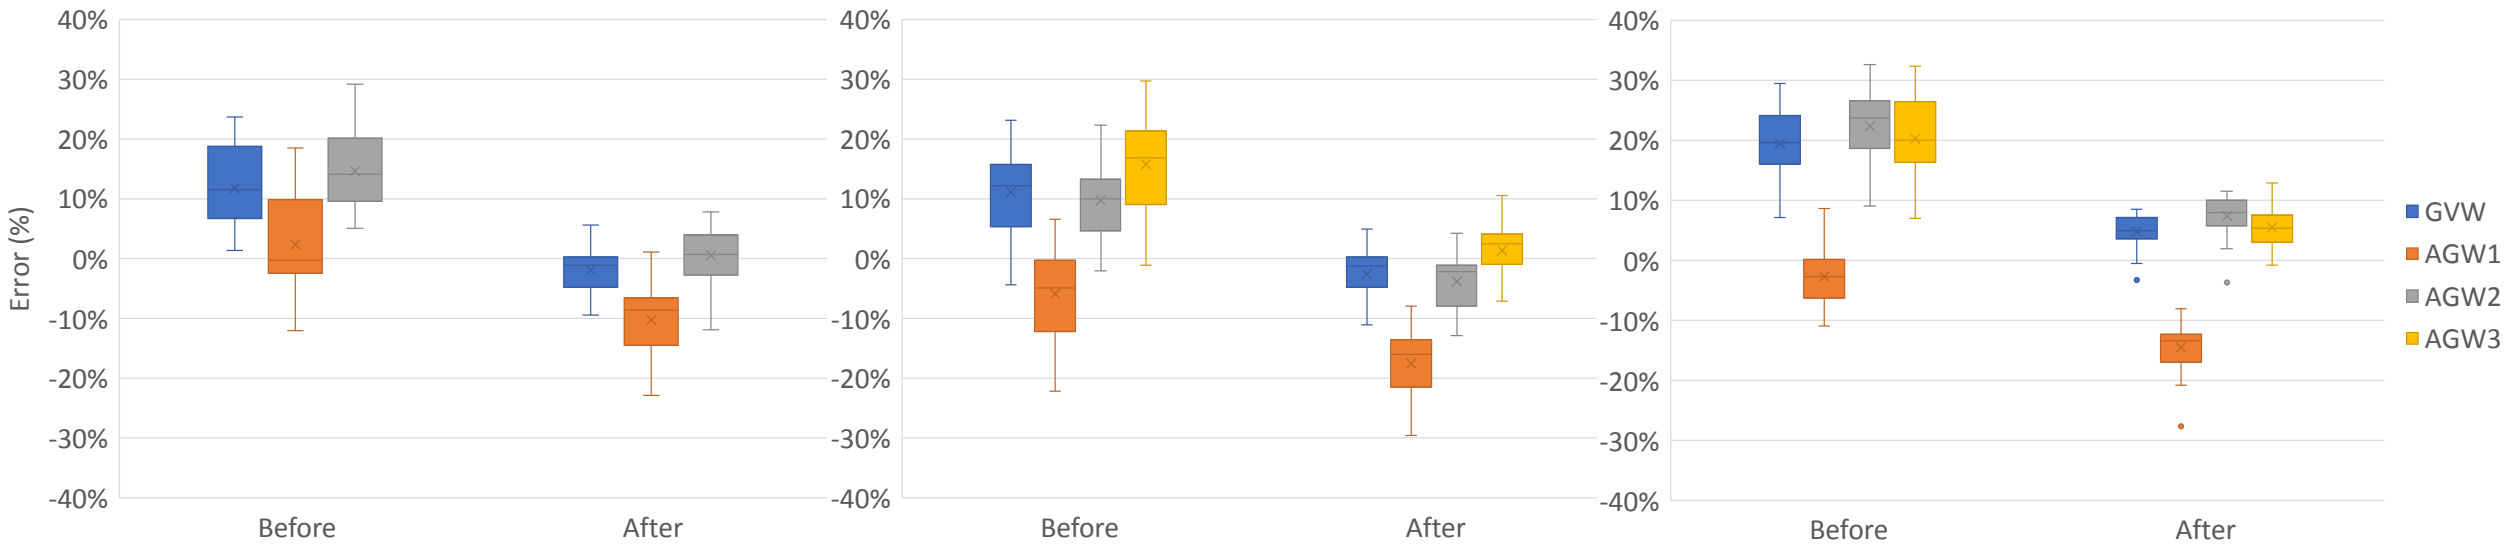

Main Results

Class	Entity	Errors before correction				Errors after correction			
		Min	Average	Max	St. dev.	Min	Average	Max	St. dev.
3C	GVW	1,45%	11,79%	23,71%	6,32%	-9,44%	-1,95%	5,71%	4,08%
	AGW1	-12,08%	2,30%	18,51%	8,47%	-22,85%	-10,28%	1,11%	6,38%
	AGW2	5,09%	14,71%	29,22%	6,63%	-11,89%	0,62%	7,82%	4,39%
2S3	GVW	-4,29%	11,14%	23,19%	6,78%	-11,05%	-2,55%	4,98%	4,04%
	AGW1	-22,19%	-5,85%	6,58%	7,83%	-29,57%	-17,46%	-7,97%	5,52%
	AGW2	-1,98%	9,70%	22,38%	6,33%	-12,88%	-3,78%	4,29%	4,17%
	AGW3	-1,00%	16,00%	30,00%	7,27%	-7,00%	1,00%	11,00%	4,30%
3S3	GVW	7,16%	19,48%	29,51%	5,80%	-3,21%	4,86%	8,57%	2,72%
	AGW1	-10,98%	-2,69%	8,64%	4,72%	-27,68%	-14,52%	-8,10%	4,26%
	AGW2	9,11%	22,32%	32,59%	5,98%	-3,73%	7,36%	11,53%	3,34%
	AGW3	7,06%	20,25%	32,36%	6,72%	-0,77%	5,50%	12,95%	3,08%

Conclusions

- ❑ The proposed method has the potential to correct the average values of the errors observed, placing all the errors closer to zero.
- ❑ It reduces the spread of the errors, as observed by the standard deviation before and after the correction.
- ❑ Limitation of the present work is that the temperatures observed during data collection were not those usually observed in practice, since the weather was mild, and the pavement wasn't exposed to the sun.
- ❑ Therefore, future studies could test the proposed model with higher temperature amplitudes. Future studies could also test the proposed method in other contexts, such as HS-WIM systems using different technologies from the ones used in this study.

*Thank you !!!
Baie dankie!*

Gustavo Garcia Otto, Dr.

otto@labtrans.ufsc.br

Transportation and Logistics Laboratory (LabTrans)

Federal University of Santa Catarina (UFSC)